

Pitch:2.00X2.00mm(0.079"X0.079")
Box Header Straight Dip Type


MXCONN
MMFA220 Series

Specifications



Current Rating: 2.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
NYLON 6T

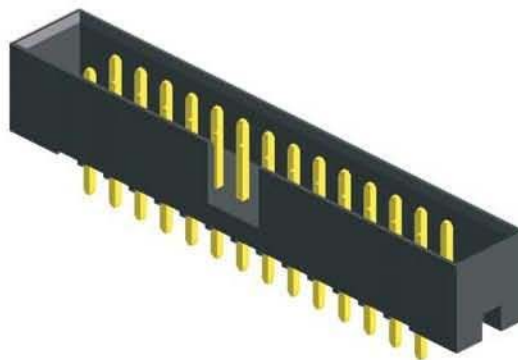

Mating with




MFFA2XX



MFFB207







MFFC2XX



MFFA204



MFFC2XX

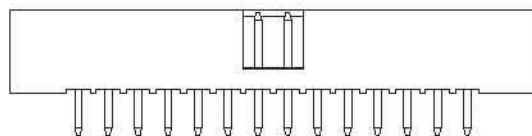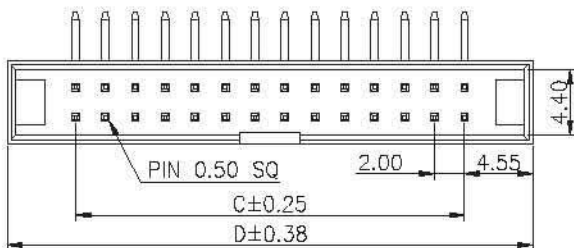

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
04	6.00	15.10	10	18.00	27.10	16	30.00	39.10	22	42.00	51.10
05	8.00	17.10	11	20.00	29.10	17	32.00	41.10	23	44.00	53.10
06	10.00	19.10	12	22.00	31.10	18	34.00	43.10	24	46.00	55.10
07	12.00	21.10	13	24.00	33.10	19	36.00	45.10	25	48.00	57.10
08	14.00	23.10	14	26.00	35.10	20	38.00	47.10			
09	16.00	25.10	15	28.00	37.10	21	40.00	49.10			

Ordering Information

MMFA220 - **XX** **XX** A **XXX**
 No. of Pins per Row Standard Plating Pin Length (A)
 04-25 02 :Gold Flash 001 :A=2.50
 Selective Plating Selective Length
 01 :Tin Custom Length Available
 05 :Gold Flash / Tin

* Standard Packaging: Tube