

# Pitch:2.54X2.54mm(0.1"X0.1") Box Header With Lock Straight Type





**MXCONN**  
MMHA220 Series

## Specifications

Current Rating: 3.0 Ampere  
Insulation Resistance: 1000MΩ Min  
Dielectric Withstanding: 600V AC  
Contact Resistance: 20mΩ Max  
Operating Temperature: -40°C to +105°C

## Materials

Contact Material: Brass  
Insulation Material: Polyester,UL 94V-0  
PBT

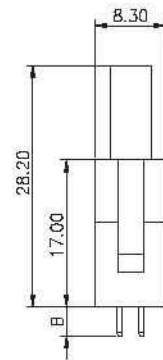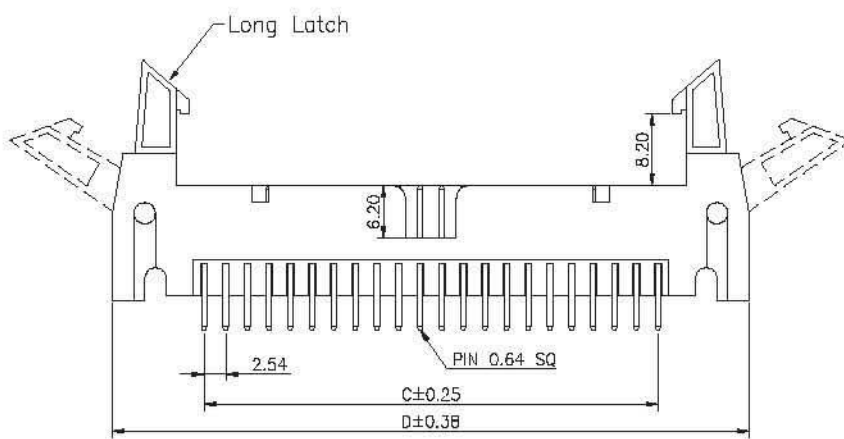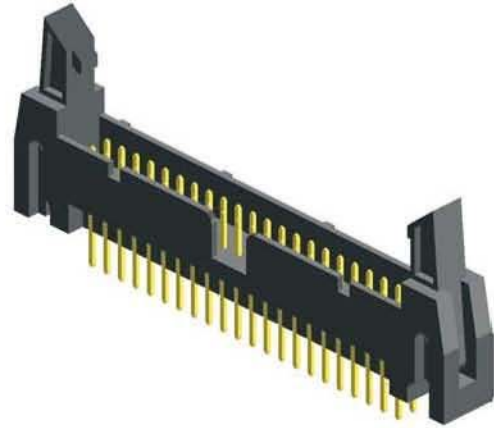

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
05	10.16	32.25	10	22.86	44.95	17	40.64	62.73	32	78.74	100.83
06	12.70	34.79	12	27.94	50.03	20	48.26	70.35			
07	15.24	37.33	13	30.48	52.57	25	60.96	83.05			
08	17.78	39.87	15	35.56	57.65	30	73.66	95.75			

## Ordering Information

MMHA220 -	XX	XX	A	XXX
	No. of Pins per Row	Standard Plating		Pin Length ( B )
	05,06,07,08	02 :Gold Flash		001 : B=3.50
	10,12,13,15	Selective Plating		Selective Length
	17,20,25,30,32	01 :Tin		Custom Length Available
		05 :Gold Flash / Tin		

\* Standard Packaging:Box

Due to technical progress,all designs,Specifications and components are subject to change without notice