

Pitch:1.27X1.27mm(0.05"X0.05") Pin Header Board Spacer Dual Rows S.M.T Type


MXCONN
MMEC2XX Series
www.mxconn.com

Specifications


Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
LCP

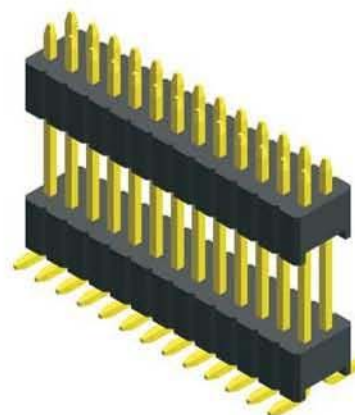

Mating with




MFE2XX




MFEB202




MFEC203





MFEE202



MFEB214



MFEC208

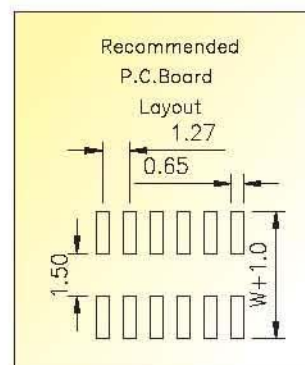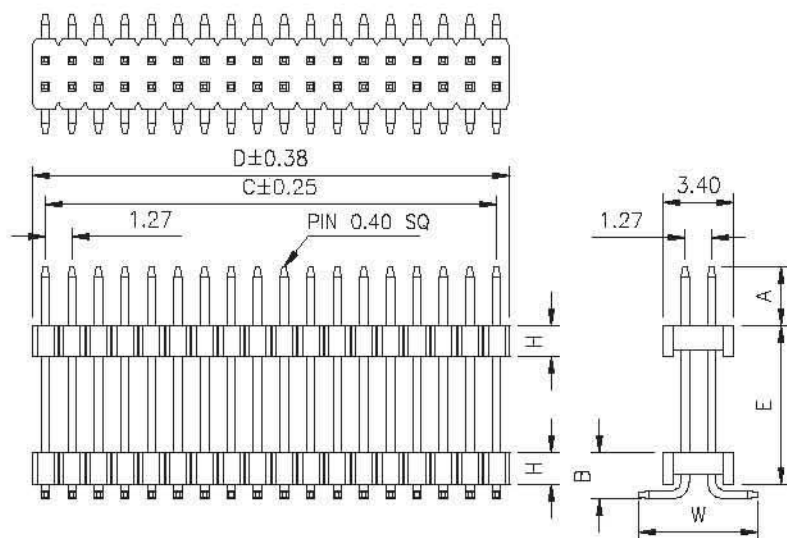

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64
03	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91
04	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18
05	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45
06	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72
07	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99
08	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26
09	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80
11	12.70	13.97	21	25.40	26.67	31	38.10	39.37			

Ordering Information

MMEC2 XX

- XX

XX

A

XXX

HEIGHT OPTION (H) Standard

No. of Pins per Row

Standard Plating

Pin Length (A / E / B / W)

31 :H=2.54 32 :H=1.00

02~40

02 :Gold Flash

MMEC231 ...A

006 :A=3.00,E=6.27,B=2.94,W=4.470

HEIGHT OPTION (H) Selective

Selective Plating

MMEC232 ...A

054 :A=1.90,E=3.70,B=1.50,W=5.50

33 :H=1.50 35 :H=2.00

01 :Tin

Selective Length

34 :H=1.70 38 :H=2.50

05 :Gold Flash / Tin

Custom Length Available

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice