

Pitch:1.27mm(0.05") Board Spacer Single Row S.M.T Type

MXCONN
MMEC132 Series




1.27 Male S.M.T Type

Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
LCP

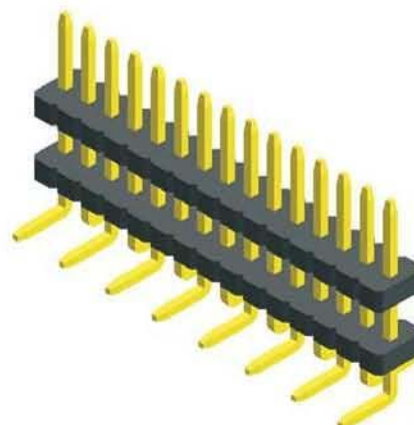

MFEA1XX




MFEA102



MFEB102





MFEC102

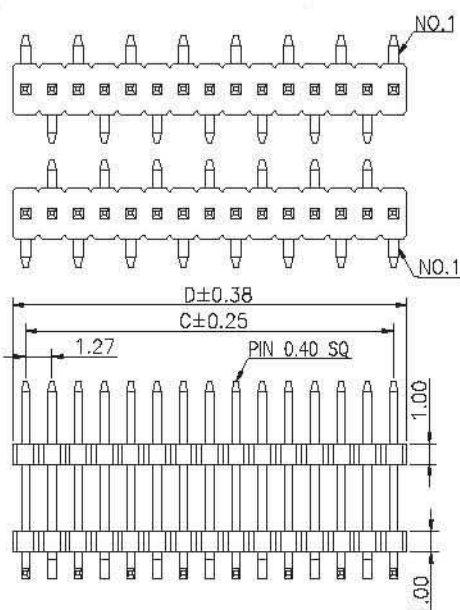

R1 TYPE

R2 TYPE



No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	2.54	3.81	12	13.97	15.24	21	25.40	26.67	30	36.83	38.10
04	3.81	5.08	13	15.24	16.51	22	26.67	27.94	31	38.10	39.37
05	5.08	6.35	14	16.51	17.78	23	27.94	29.21	32	39.37	40.64
06	6.35	7.62	15	17.78	19.05	24	29.21	30.48	33	40.64	41.91
07	7.62	8.89	16	19.05	20.32	25	30.48	31.75			
08	8.89	10.16	17	20.32	21.59	26	31.75	33.02			
09	10.16	11.43	18	21.59	22.86	27	33.02	34.29			
10	11.43	12.70	19	22.86	24.13	28	34.29	35.56			
11	12.70	13.97	20	24.13	25.40	29	35.56	36.83			

Ordering Information

MMEC132 - XX

No. of Pins per Row

03~33

XX

Standard Plating

02 :Gold Flash

Selective Plating

01 :Tin

05 :Gold Flash / Tin

A XXX

Pin Length (A / E / B / F)(TYPE)

004 :A=3.50,B=4.00,E=5.50,F=2.00 (R2)

005 :A=3.00,B=2.00,E=4.50,F=0.68 (R1)

Selective Length

Custom Length Available

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice