

Pitch:1.27X1.27mm(0.05"X0.05") Pin Header Board Spacer Dual Row S.M.T Type

MXCONN
MMED201 Series

Specifications


Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester, UL 94V-0
LCP




Mating with




MFEC2XX




MFEB202




MFEC203







MFEE202



MFEB214



MFEC208

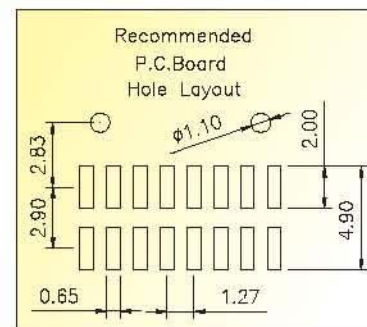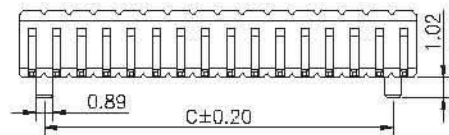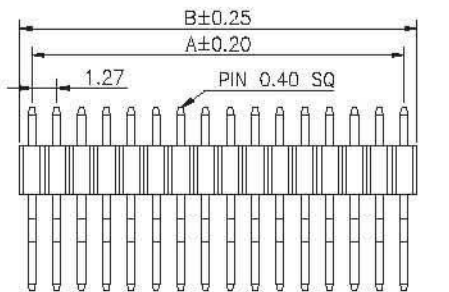

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
-	A	B	C	-	A	B	C	-	A	B	C	-	A	B	C
03	2.54	3.81	1.27	12	13.97	15.24	12.70	22	26.67	27.94	25.40	32	39.37	40.64	38.10
04	3.81	5.08	2.54	13	15.24	16.51	13.97	23	27.94	29.21	26.67	33	40.64	41.91	39.37
05	5.08	6.35	3.81	14	16.51	17.78	15.24	24	29.21	30.48	27.94				
06	6.35	7.62	5.08	15	17.78	19.05	16.51	25	30.48	31.75	29.21				
07	7.62	8.89	6.35	16	19.05	20.32	17.78	26	31.75	33.02	30.48				
08	8.89	10.16	7.62	17	20.32	21.59	19.05	27	33.02	34.29	31.75				
09	10.16	11.43	8.89	18	21.59	22.86	20.32	28	34.29	35.56	33.02				
10	11.43	12.70	10.16	19	22.86	24.13	21.59	29	35.56	36.83	34.29				
11	12.70	13.97	11.43	20	24.13	25.40	22.86	30	36.83	38.10	35.56				
				21	25.40	26.67	24.13	31	38.10	39.37	36.83				

Ordering Information

MMED201 -	XX	XX	B001
	No. of Pins per Row		Standard Plating
	03~33	02	:Gold Flash
			Selective Plating
		01	:Tin
		05	:Gold Flash / Tin

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice