

Pitch:3.96mm(0.156")
Power Socket Single Row Dip Type

MXCONN
MMJA103 Series


3.96 Male Dip Type

Specifications



Current Rating: 7.9 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

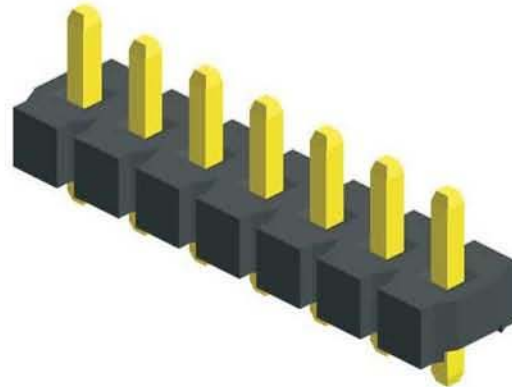





Mating with



MFJA102



MFJC101

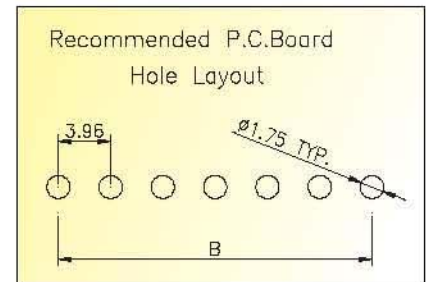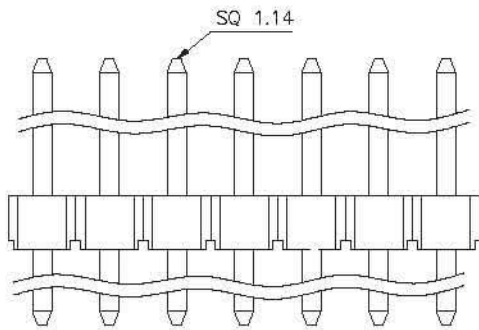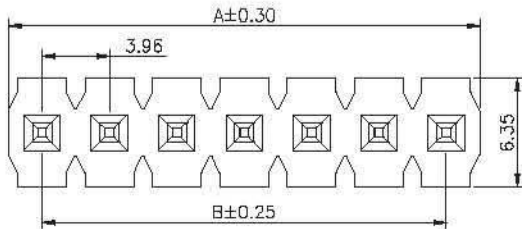

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	7.92	3.96	08	31.68	27.72	14	55.44	51.48	20	79.20	75.24
03	11.88	7.92	09	35.64	31.68	15	59.40	55.44	21	83.16	79.20
04	15.84	11.88	10	39.60	35.64	16	63.36	59.40	22	87.12	83.16
05	19.80	15.84	11	43.56	39.60	17	67.32	63.36	23	91.08	87.12
06	23.76	19.80	12	47.52	43.56	18	71.28	67.32	24	95.04	91.08
07	27.72	23.76	13	51.48	47.52	19	75.24	71.28			

Ordering Information

MMJA103-	XX	XX	A	XXX
	No. of Pins per Row	Standard Plating		Pin Length (C / D)
	02~24	02 :Gold Flash		001 : C=4.55,D=2.55
		Selective Plating		002 : C=11.45,D=4.45
		01 :Tin		004 : C=20.55,D=4.00
		05 :Gold Flash / Tin		005 : C=3.80,D=12.10
				Selective Length
				Custom Length Available

*Standard Packaging:Box