

Pitch:3.96mm(0.156")
Power Socket Single Row R/A Type


MXCONN
MMJB101 Series

Specifications



Current Rating: 7.9 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

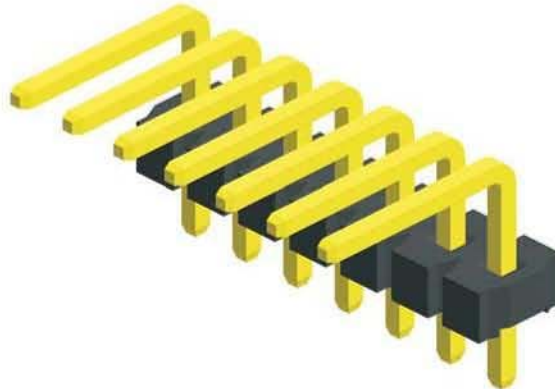





Mating with



MFJA102



MFJC101

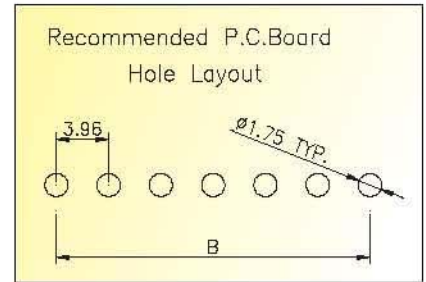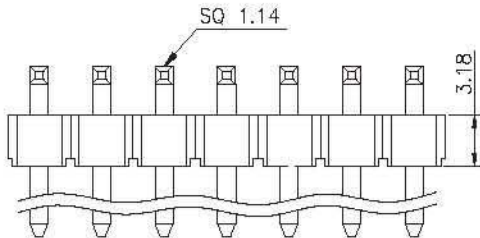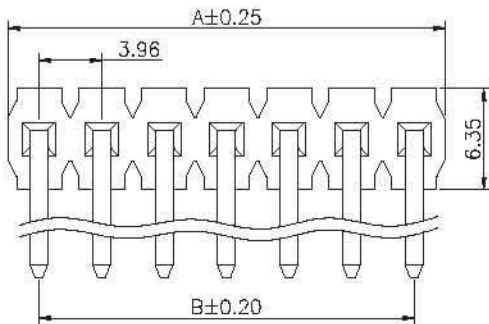

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	7.92	3.96	08	31.68	27.72	14	55.44	51.48	20	79.20	75.24
03	11.88	7.92	09	35.64	31.68	15	59.40	55.44	21	83.16	79.20
04	15.84	11.88	10	39.60	35.64	16	63.36	59.40	22	87.12	83.16
05	19.80	15.84	11	43.56	39.60	17	67.32	63.36	23	91.08	87.12
06	23.76	19.80	12	47.52	43.56	18	71.28	67.32	24	95.04	91.08
07	27.72	23.76	13	51.48	47.52	19	75.24	71.28			

Ordering Information

MMJB101 - XX

No. of Pins per Row

02~24

XX

Standard Plating

02 :Gold Flash

Selective Plating

01 :Tin

05 :Gold Flash / Tin

A

XXX

Pin Length (D / E / F)

001 : D=4.45,E=8.15,F=2.55

002 : D=4.00,E=13.60,F=4.95

003 : D=4.50,E=10.75,F=6.30

Selective Length

Custom Length Available

*Standard Packaging:Tube