

Pitch: 1.00X1.45mm(0.039"X0.057")
Board To Board Female S.M.T Type

MXCONN
MFCC201 Series


Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C






Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
NYLON 6T

Mating with



MMCC204

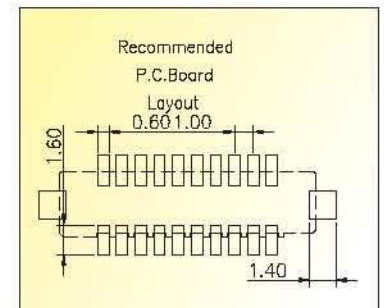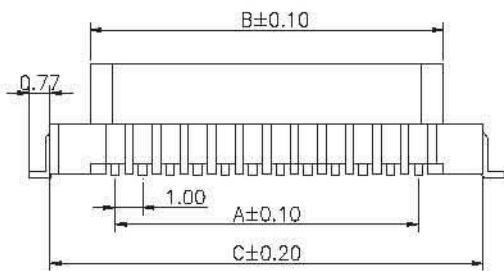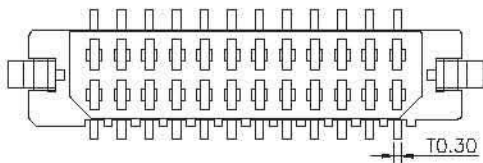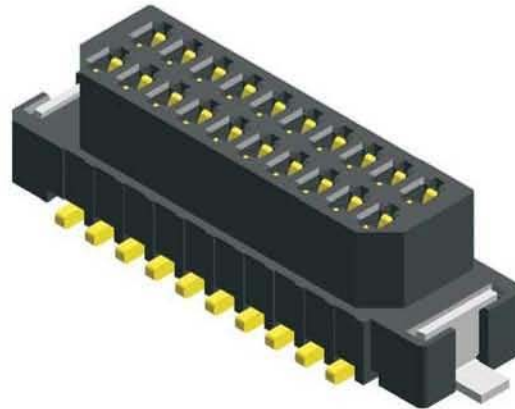

No. of Pins/Row	Dimension Information			
	A	B	C	D
03	2.00	3.80	6.70	8.25
04	3.00	4.80	7.70	9.25
05	4.00	5.80	8.70	10.25
06	5.00	6.80	9.70	11.25
07	6.00	7.80	10.70	12.25
08	7.00	8.80	11.70	13.25
09	8.00	9.80	12.70	14.25

No. of Pins/Row	Dimension Information			
	A	B	C	D
10	9.00	10.80	13.70	15.25
11	10.00	11.80	14.70	16.25
12	11.00	12.80	15.70	17.25
13	12.00	13.80	16.70	18.25
14	13.00	14.80	17.70	19.25
15	14.00	15.80	18.70	20.25

Ordering Information

MFCC201 - XX XX A001
 No. of Pins per Row Standard Plating
 03 ~ 15 02 :Gold Flash
 Selective Plating
 01 :Tin

*Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice