

Pitch:1.27X1.27mm(0.05"X0.05") Dual Rows Right Angle Dip Type






MXCONN
MFE202 Series

Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C




Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

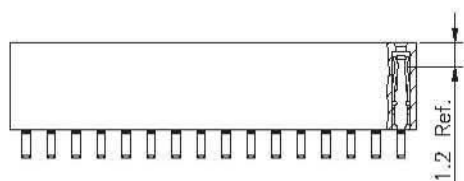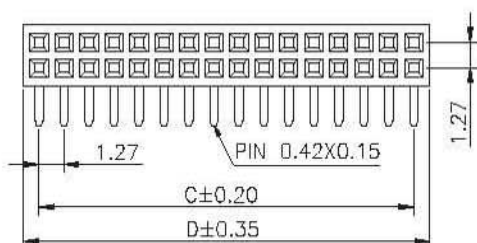
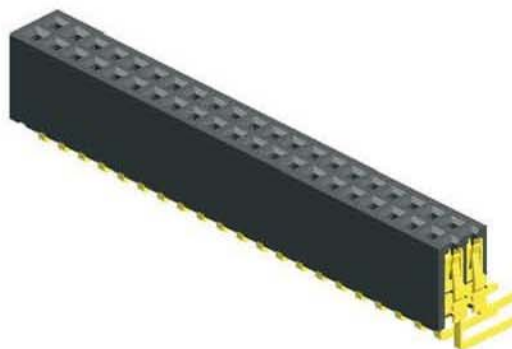


PS:Suggested Mating Pin Length:2.0~4.2mm


Mating with



MMEA2XX



MMEB2XX



MMEC2XX

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	2.54	4.16	15	17.78	19.40	27	33.02	34.64	39	48.26	49.88
04	3.81	5.43	16	19.05	20.67	28	34.29	35.91	40	49.53	51.15
05	5.08	6.70	17	20.32	21.94	29	35.56	37.18	41	50.80	52.42
06	6.35	7.97	18	21.59	23.21	30	36.83	38.45	42	52.07	53.69
07	7.62	9.24	19	22.86	24.48	31	38.10	39.72	43	53.34	54.96
08	8.89	10.51	20	24.13	25.75	32	39.37	40.99	44	54.61	56.23
09	10.16	11.78	21	25.40	27.02	33	40.64	42.26	45	55.88	57.50
10	11.43	13.05	22	26.67	28.29	34	41.91	43.53	46	57.15	58.77
11	12.70	14.32	23	27.94	29.56	35	43.18	44.80	47	58.42	60.04
12	13.97	15.59	24	29.21	30.83	36	44.45	46.07	48	59.69	61.31
13	15.24	16.86	25	30.48	32.10	37	45.72	47.34	49	60.96	62.58
14	16.51	18.13	26	31.75	33.37	38	46.99	48.61	50	62.23	63.85

Ordering Information

MFE202	-	XX	XX	A	XXX
		No. of Pins per Row	Standard Plating		Pin Length (A / B)
		03 ~50	01 :Tin		001 :A=4.50,B=2.00
			02 :Gold Flash		003 :A=5.00,B=1.20
			Selective Plating		Selective Length
			05 :Gold Flash / Tin		Custom Length Available

*Standard Packaging:Tube

Due to technical progress,all designs,Specifications and components are subject to change without notice