

Pitch:1.27X1.27mm(0.05"X0.05") Female Header Dual Rows Straddle Type





MXCONN
MFEE202 Series

Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40℃ to +105℃






Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

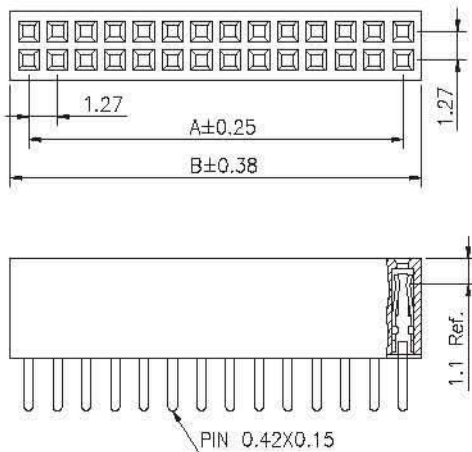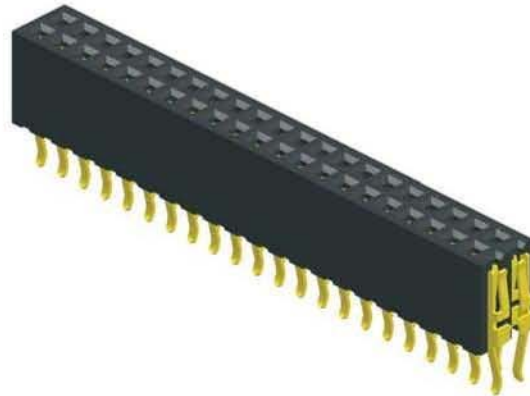

PS:Suggested Mating Pin Length:2.0~4.2mm

Mating with



MMEA2XX
MMEB2XX
MMEC2XX

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	1.27	2.98	15	17.78	19.40	28	34.29	35.91	41	50.80	52.42
03	2.54	4.16	16	19.05	20.67	29	35.56	37.18	42	52.07	53.69
04	3.81	5.43	17	20.32	21.94	30	36.83	38.45	43	53.34	54.96
05	5.08	6.70	18	21.59	23.21	31	38.10	39.72	44	54.61	56.23
06	6.35	7.97	19	22.86	24.48	32	39.37	40.99	45	55.88	57.50
07	7.62	9.24	20	24.13	25.75	33	40.64	42.26	46	57.15	58.77
08	8.89	10.51	21	25.40	27.02	34	41.91	43.53	47	58.42	60.04
09	10.16	11.78	22	26.67	28.29	35	43.18	44.80	48	59.69	61.31
10	11.43	13.05	23	27.94	29.56	36	44.45	46.07	49	60.96	62.58
11	12.70	14.32	24	29.21	30.83	37	45.72	47.34	50	62.23	63.85
12	13.97	15.59	25	30.48	32.10	38	46.99	48.61			
13	15.24	16.86	26	31.75	33.37	39	48.26	49.88			
14	16.51	18.13	27	33.02	34.64	40	49.53	51.15			

Ordering Information

MFEE202 -	XX	XX	A XXX
No. of Pins per Row	Standard Plating	Pin TYPE (C)	
02~50	01 :Tin	001 :C=1.00	
	02 :Gold Flash	Selective Length	
	Selective Plating	Custom Length Available	
	05 :Gold Flash / Tin		

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice