

Pitch:3.96mm(0.156")
Power Socket Single Row Dip Type


MXCONN
MFJA102 Series

Specifications






Current Rating: 7.9 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

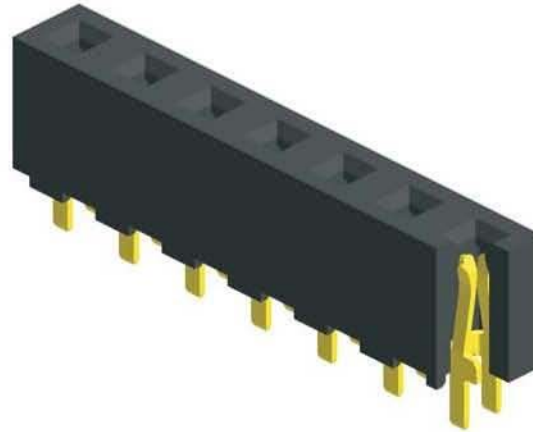

Mating with

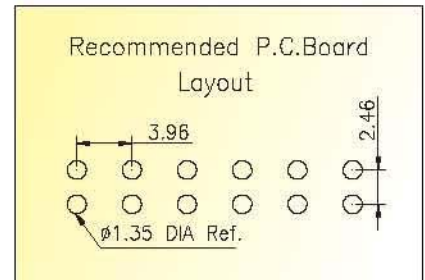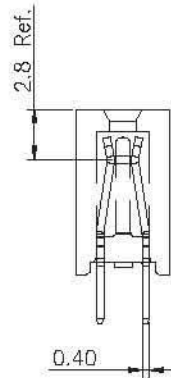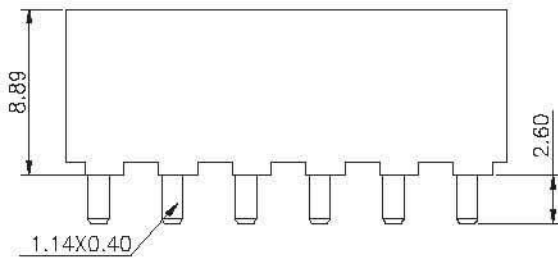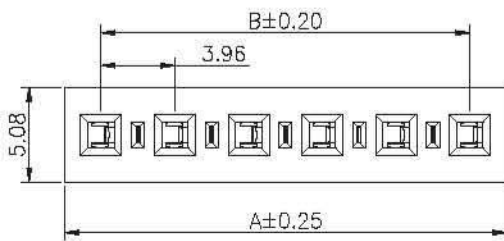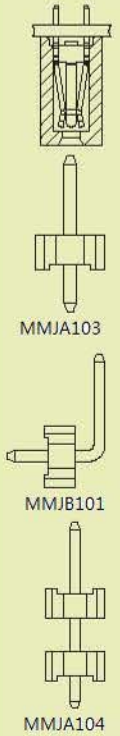

PS:Suggested Mating Pin Length:3.8~8.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	7.92	3.96	08	31.68	27.72	14	55.44	51.48	20	79.20	75.24
03	11.88	7.92	09	35.64	31.68	15	59.40	55.44	21	83.16	79.20
04	15.84	11.88	10	39.60	35.64	16	63.36	59.40	22	87.12	83.16
05	19.80	15.84	11	43.56	39.60	17	67.32	63.36	23	91.08	87.12
06	23.76	19.80	12	47.52	43.56	18	71.28	67.32	24	95.04	91.08
07	27.72	23.76	13	51.48	47.52	19	75.24	71.28			

Ordering Information

MFJA102 - **XX** **XX** A001
 No. of Pins per Row **Standard Plating**
 02~24 02 :**Gold Flash**
Selective Plating
 01 :**Tin**
 05 :**Gold Flash / Tin**

*Standard Packaging:Tube