

Pitch:3.96mm(0.156")
Power Socket Single Row S.M.T Type

MXCONN
MFJC101 Series


3.96 Female S.M.T Type

Specifications




Current Rating: 7.9 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 1000V AC
Contact Resistance: 30mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

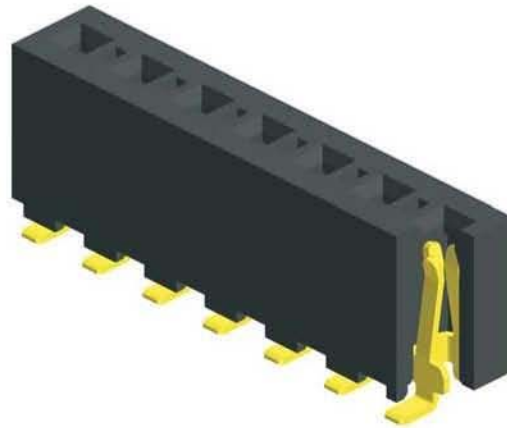

Mating with

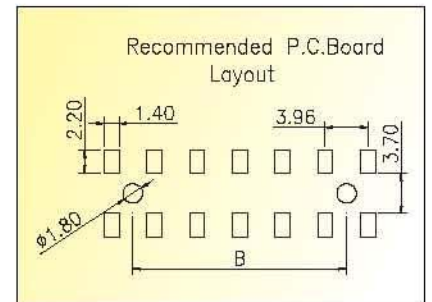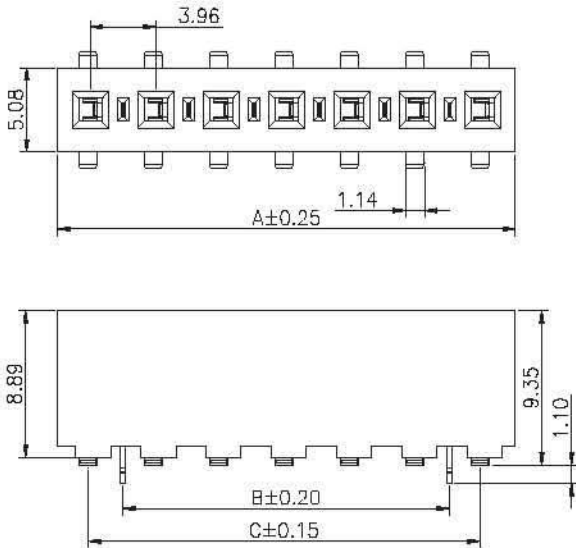

PS:Suggested Mating Pin Length:3.8~8.5mm

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	7.92	-	3.96	08	31.68	23.76	27.72	14	55.44	47.52	51.48	20	79.20	71.28	75.24
03	11.88	3.96	7.92	09	35.64	27.72	31.68	15	59.40	51.48	55.44	21	83.16	75.24	79.20
04	15.84	7.92	11.88	10	39.60	31.68	35.64	16	63.36	55.44	59.40	22	87.12	79.20	83.16
05	19.80	11.88	15.84	11	43.56	35.64	39.60	17	67.32	59.40	63.36	23	91.08	83.16	87.12
06	23.76	15.84	19.80	12	47.52	39.60	43.56	18	71.28	63.36	67.32	24	95.04	87.12	91.08
07	27.72	19.80	23.76	13	51.48	43.56	47.52	19	75.24	67.32	71.28				

Ordering Information

MFJC101 - **XX** **XX** F001
 No. of Pins per Row **Standard Plating**
02-24 **02** :Gold Flash
Selective Plating
01 :Tin
05 :Gold Flash / Tin

*Standard Packaging:Tube