

Pitch:2.00X2.00mm(0.079"X0.079") Female Header Dual Rows Straight Type


MXCONN
MFFA201 Series

Specifications



Current Rating: 2.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
NYLON 6T

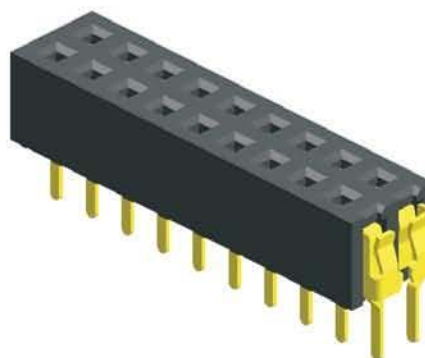

Mating with




MMFA2XX




MMFC2XX




MMFB203



MMFB215





MMFC2XX




MMFB2XX


Recommended
P.C.Board
Hole Layout




MMFA215



MMFD201



MMFB2XX

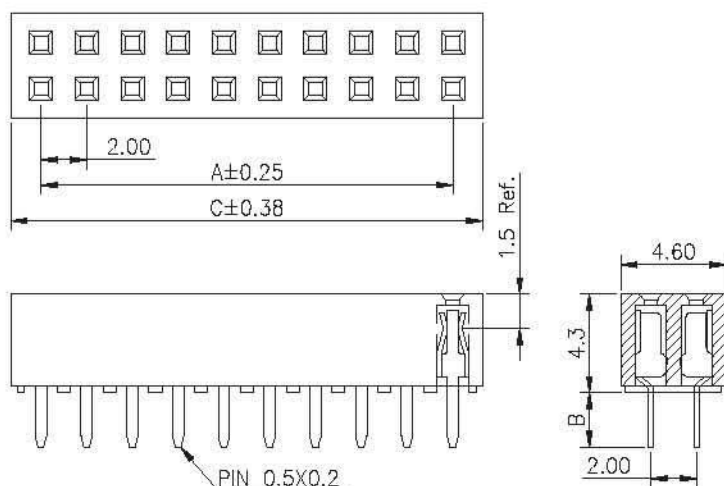

PS:Suggested Mating Pin Length:3.0~4.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	12	22.00	24.60	22	24.00	44.60	32	62.00	64.60
03	4.00	6.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
04	6.00	8.60	14	24.00	28.60	24	46.00	48.60	34	66.00	68.60
05	8.00	10.60	15	24.00	30.60	25	48.00	50.60	35	68.00	70.60
06	10.00	12.60	16	24.00	32.60	26	50.00	52.60	36	70.00	72.60
07	12.00	14.60	17	24.00	34.60	27	52.00	54.60	37	72.00	74.60
08	14.00	16.60	18	24.00	36.60	28	54.00	56.60	38	74.00	76.60
09	16.00	18.60	19	24.00	38.60	29	56.00	58.60	39	76.00	78.60
10	18.00	20.60	20	24.00	40.60	30	58.00	60.60	40	78.00	80.60
11	20.00	22.60	21	24.00	42.60	31	60.00	62.60			

Ordering Information

MFFA201 - XX XX A XXX

No. of Pins per Row Standard Plating Pin Length (B)

02 ~40 02 :Gold Flash 001 :B=2.40

Selective Plating Selective Length

01 :Tin Custom Length Available

05 :Gold Flash / Tin

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice