

Pitch: 2.00X2.00mm(0.079"X0.079")

Female Header Dual Rows Straight Base 7.20H Type


MXCONN
MFFA203 Series

Specifications


Current Rating: 2.0 Ampere
 Insulation Resistance: 1000MΩ Min
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON 6T

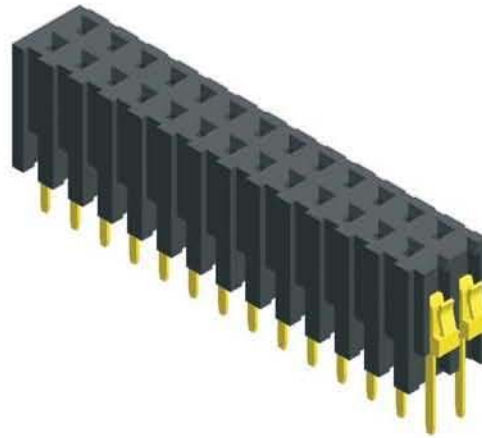

Mating with




MMFA2XX



MMFC219




MMFB203





MMFB215




MMFC2XX




MMFB2XX

Recommended
P.C.Board
Hole Layout



MMFA215



MMFD201



MMFB2XX

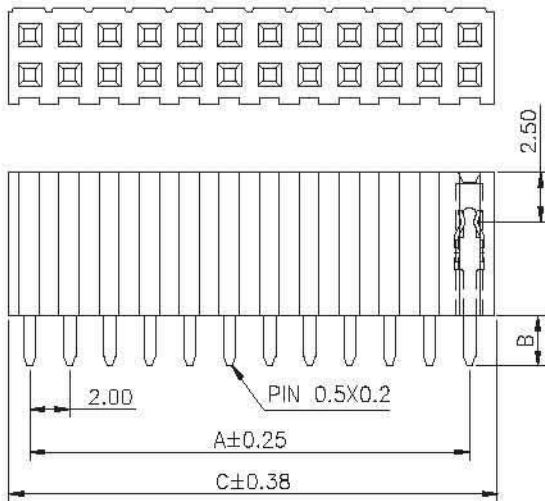

PS:Suggested Mating Pin Length:4.0~7.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.50	12	22.00	24.50	22	42.00	44.50	32	62.00	64.50
03	4.00	6.50	13	24.00	26.50	23	44.00	46.50	33	64.00	66.50
04	6.00	8.50	14	26.00	28.50	24	46.00	48.50	34	66.00	68.50
05	8.00	10.50	15	28.00	30.50	25	48.00	50.50	35	68.00	70.50
06	10.00	12.50	16	30.00	32.50	26	50.00	52.50	36	70.00	72.50
07	12.00	14.50	17	32.00	34.50	27	52.00	54.50	37	72.00	74.50
08	14.00	16.50	18	34.00	36.50	28	54.00	56.50	38	74.00	76.50
09	16.00	18.50	19	36.00	38.50	29	56.00	58.50	39	76.00	78.50
10	18.00	20.50	20	38.00	40.50	30	58.00	60.50	40	78.00	80.50
11	20.00	22.50	21	40.00	42.50	31	60.00	62.50			

Ordering Information

MFFA203 - XX

XX

A XXX

No. of Pins per Row

Standard Plating

Pin Length (B)

02 ~40

02 :Gold Flash

001 : B=2.50

Selective Plating

003 : B=2.30

01 :Tin

Selective Length

05 :Gold Flash / Tin

Custom Length Available

* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice