

Pitch:2.00x2.00mm(0.079"X0.079")
 Female Header Dual Rows Straight Type


MXCONN
 MFFA204 Series

Specifications



Current Rating: 2.0 Ampere
 Insulation Resistance: 1000MΩ Min
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 Insulation Material: Polyester,UL 94V-0
 NYLON 6T

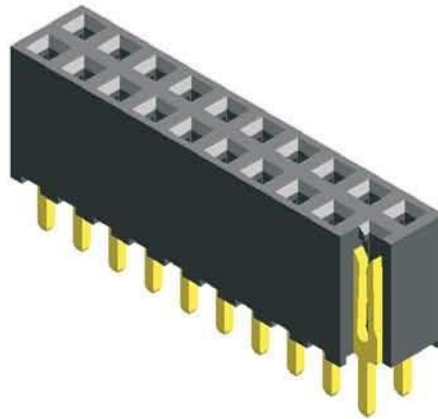

Mating with

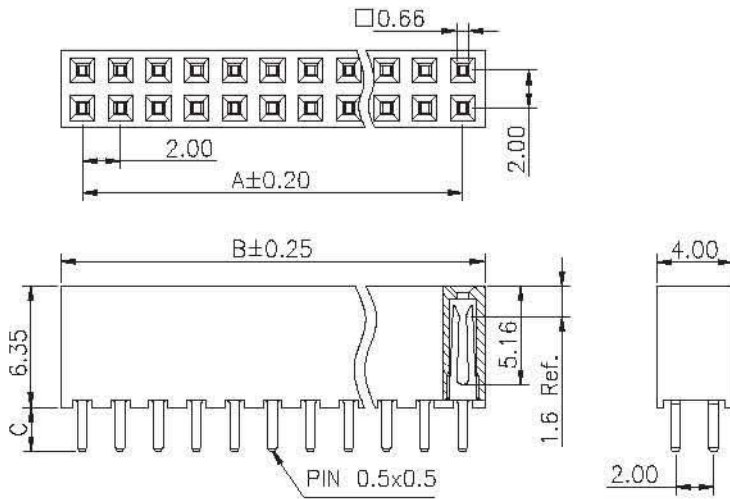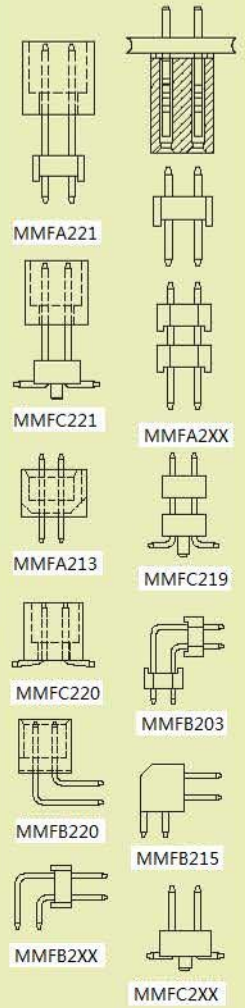

Recommended
 P.C.Board
 Hole Layout



PS:Suggested Mating Pin Length:3.0~4.9mm

| No. of Pins/Row | Dimension Information | | No. of Pins/Row | Dimension Information | | No. of Pins/Row | Dimension Information | | No. of Pins/Row | Dimension Information | |
|-----------------|-----------------------|-------|-----------------|-----------------------|-------|-----------------|-----------------------|-------|-----------------|-----------------------|-------|
| | A | B | | A | B | | A | B | | A | B |
| 02 | 2.00 | 4.30 | 12 | 22.00 | 24.30 | 22 | 42.00 | 44.30 | 32 | 62.00 | 64.30 |
| 03 | 4.00 | 6.30 | 13 | 24.00 | 26.30 | 23 | 44.00 | 46.30 | 33 | 64.00 | 66.30 |
| 04 | 6.00 | 8.30 | 14 | 26.00 | 28.30 | 24 | 46.00 | 48.30 | 34 | 66.00 | 68.30 |
| 05 | 8.00 | 10.30 | 15 | 28.00 | 30.30 | 25 | 48.00 | 50.30 | 35 | 68.00 | 70.30 |
| 06 | 10.00 | 12.30 | 16 | 30.00 | 32.30 | 26 | 50.00 | 52.30 | 36 | 70.00 | 72.30 |
| 07 | 12.00 | 14.30 | 17 | 32.00 | 34.30 | 27 | 52.00 | 54.30 | 37 | 72.00 | 74.30 |
| 08 | 14.00 | 16.30 | 18 | 34.00 | 36.30 | 28 | 54.00 | 56.30 | 38 | 74.00 | 76.30 |
| 09 | 16.00 | 18.30 | 19 | 36.00 | 38.30 | 29 | 56.00 | 58.30 | 39 | 76.00 | 78.30 |
| 10 | 18.00 | 20.30 | 20 | 38.00 | 40.30 | 30 | 58.00 | 60.30 | 40 | 78.00 | 80.30 |
| 11 | 20.00 | 22.30 | 21 | 40.00 | 42.30 | 31 | 60.00 | 62.30 | | | |

Ordering Information

| | | | | |
|-----------|---------------------|----------------------|---|-------------------------|
| MFFA204 - | XX | XX | A | XXX |
| | No. of Pins per Row | Standard Plating | | Pin Length (C) |
| | 02 ~40 | 02 :Gold Flash | | 001 :C=2.30 |
| | | Selective Plating | | Selective Length |
| | | 01 :Tin | | Custom Length Available |
| | | 05 :Gold Flash / Tin | | |

* Standard Packaging:Tube