

Pitch:2.00mm(0.079")  
 Female Header Single Row Right Angle Type

**MXCONN**  
 MFFB102 Series


2.00 Female Dip Type

**Specifications**



- Current Rating: 2.0 Ampere
- Insulation Resistance: 1000MΩ Min
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20mΩ Max
- Operating Temperature: -40°C to +105°C

**Materials**


- Contact Material: Phosphor Bronze
- Insulation Material: Polyester,UL 94V-0  
 NYLON 6T

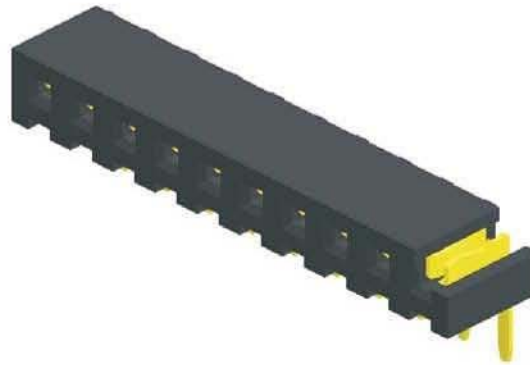


Mating with




MMFA1XX








MMFC1XX




MMFB106




MMFC104

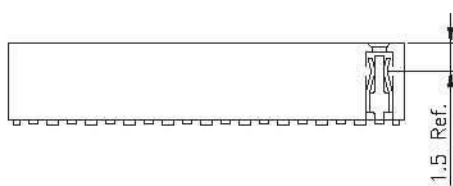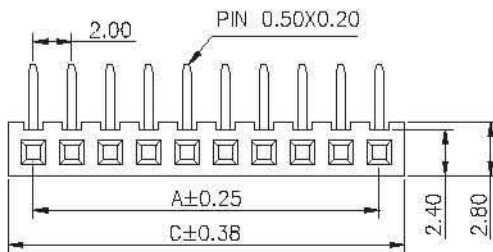


MMFA1XX



MMFB1XX



MMFD102



MMFC104

PS:Suggested Mating Pin Length:3.0~4.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
03	4.00	6.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
04	6.00	8.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
05	8.00	10.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
06	10.00	12.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
07	12.00	14.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
08	14.00	16.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
09	16.00	18.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
10	18.00	20.60	20	38.00	40.60	30	58.00	60.60	40	78.00	80.60
11	20.00	22.60	21	40.00	42.60	31	60.00	62.60			

**Ordering Information**

MFFB102 -	XX	XX	A XXX
No. of Pins per Row	Standard Plating	Pin Length ( B )	
02 ~40	02 :Gold Flash	001 :B=3.00	
	Selective Plating	Selective Length	
	01 :Tin	Custom Length Available	
	05 :Gold Flash / Tin		

\* Standard Packaging: Tube

Due to technical progress, all designs, Specifications and components are subject to change without notice