

Pitch:2.54X2.54mm(0.1"X0.1") Female Header Dual Rows Straight Type


MXCONN
MFHA2XX Series

Specifications

Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
PBT

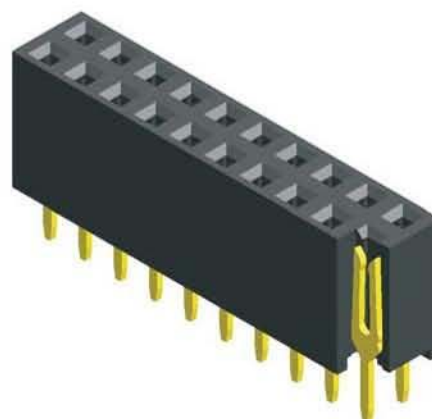


Mating with




MMHA202




MMHA2XX




MMHA210





MMHA212



MMHC210




MMHC201



MMHD201

MMHB210

MMHB201

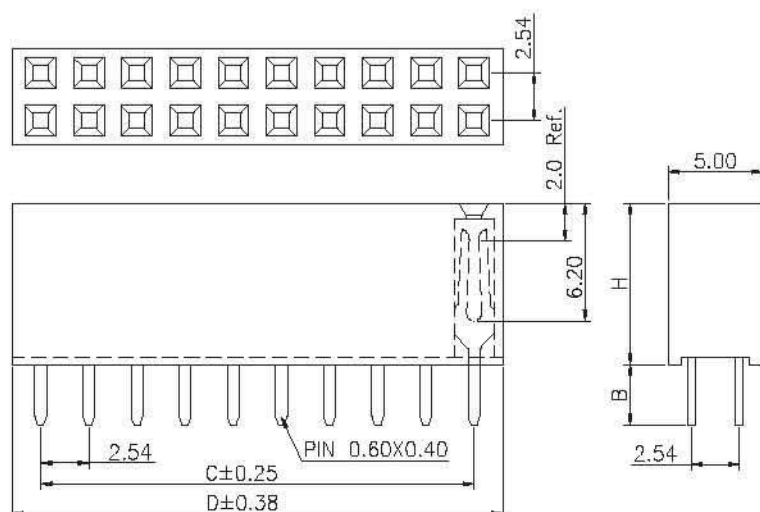

PS:Suggested Mating Pin Length:4.0~6.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	5.58	12	27.94	30.98	22	53.34	56.38	32	78.74	81.78
03	5.08	8.12	13	30.48	33.52	23	55.88	58.92	33	81.28	84.32
04	7.62	10.66	14	33.02	36.06	24	58.42	61.46	34	83.82	86.86
05	10.16	13.20	15	35.56	38.60	25	60.96	64.00	35	86.36	89.40
06	12.70	15.74	16	38.10	41.14	26	63.50	66.54	36	88.90	91.94
07	15.24	18.28	17	40.64	43.68	27	66.04	69.08	37	91.44	94.48
08	17.78	20.82	18	43.18	46.22	28	68.58	71.62	38	93.98	97.02
09	20.32	23.36	19	45.72	48.76	29	71.12	74.16	39	96.52	99.56
10	22.86	25.90	20	48.26	51.30	30	73.66	76.70	40	99.06	102.10
11	25.40	28.44	21	50.80	53.84	31	76.20	79.24			

Ordering Information

MFHA2	XX	-	XX	XX	A	XXX
	HEIGHT OPTION (H)		No. of Pins per Row	Standard Plating		Pin Length (B)
01	:H=8.50		02~40	02 :Gold Flash	MFHA201 ...A	001 :B=3.20
03	:H=11.00			Selective Plating	MFHA203 ...A	001 :B=3.20
				01 :Tin		Selective Length
				05 :Gold Flash / Tin		Custom Length Available

* Standard Packaging:Tube

Due to technical progress,all designs,Specifications and components are subject to change without notice