

Pitch:2.54X2.54mm(0.1"X0.1")
Female Header Dual Rows Dip Type





MXCONN
MFHA209 Series

Specifications


Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
PBT

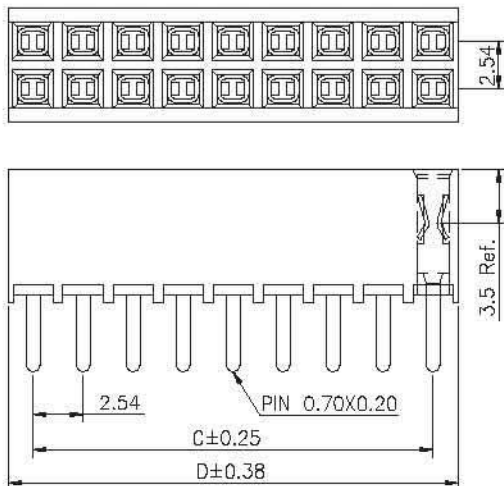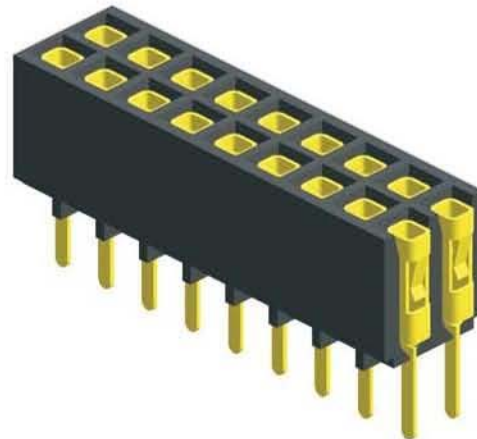


Mating with




MMHC202




MMHC210




MMHA202



MMHC201



MMHA210



MMHB210

PS:Suggested Mating Pin Length:5.0~6.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	5.08	11	25.40	27.94	20	48.26	50.80	29	71.12	73.66
03	5.08	7.62	12	27.94	30.48	21	50.80	53.34	30	73.66	76.20
04	7.62	10.16	13	30.48	33.02	22	53.34	55.88			
05	10.16	12.70	14	33.02	35.56	23	55.88	58.42			
06	12.70	15.24	15	35.56	38.10	24	58.42	60.96			
07	15.24	17.78	16	38.10	40.64	25	60.96	63.50			
08	17.78	20.32	17	40.64	43.18	26	63.50	66.04			
09	20.32	22.86	18	43.18	45.72	27	66.04	68.58			
10	22.86	25.40	19	45.72	48.26	28	68.58	71.12			

Ordering Information

MFHA209 -	XX	XX	A	XXX
No. of Pins per Row	Standard Plating	Pin Length (B)		
02 ~30	02 :Gold Flash	001 : B=3.50		
	Selective Plating	Selective Length		
	01 :Tin	Custom Length Available		
	05 :Gold Flash / Tin			

* Standard Packaging:Tube

Due to technical progress,all designs,Specifications and components are subject to change without notice