

Pitch:2.54X2.54mm(0.1"X0.1") Female Header Dual Rows Dip Type


MXCONN
MFHA211 Series

Specifications

Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
NYLON 6T

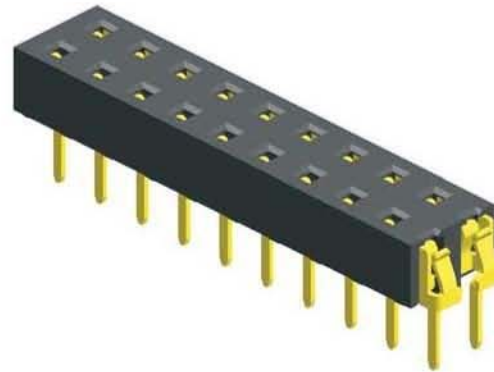

Mating with



MMHA202



MMHA2XX



MMHA210




MMHA212




MMHC210



MMHC201





MMHD201



MMHB210



MMHB201

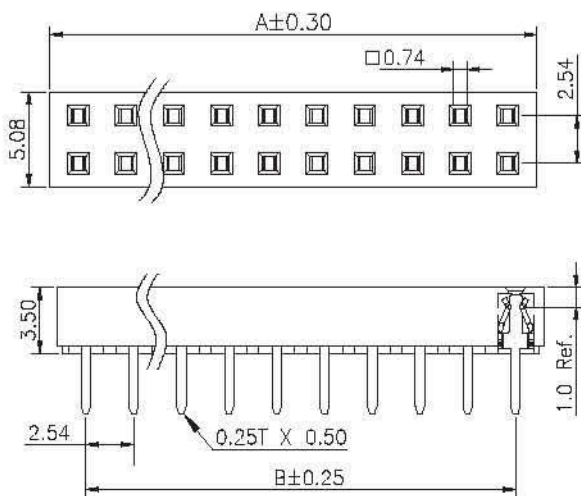

PS:Suggested Mating Pin Length:2.5~3.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	5.58	2.54	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
03	8.12	5.08	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
04	10.66	7.62	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
05	13.20	10.16	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
06	15.74	12.70	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
07	18.28	15.24	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
08	20.82	17.78	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
09	23.36	20.32	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
10	25.90	22.86	20	51.30	48.26	30	76.70	73.66	40	102.10	99.06
11	28.44	25.40	21	53.84	50.80	31	79.24	76.20			

Ordering Information

MFHA211	-	XX	XX	A	XXX
		No. of Pins per Row	Standard Plating		Pin Length (C)
		02~40	02 :Gold Flash		001 : C=3.10
			Selective Plating		Selective Length
			01 :Tin		Custom Length Available
			05 :Gold Flash / Tin		

* Standard Packaging:Tube

Due to technical progress,all designs,Specifications and components are subject to change without notice