



Pitch:1.00mm (0.0393")
FPC Connector Straight SMT Type

Mxconn




Materials

Contact Material: Phosphor Bronze
Insulator Material: PA46/LCP
Flame Retardant Grade: UL 94V-0

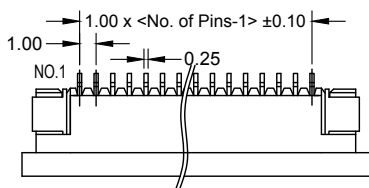

Specifications

Current Rating: 0.5 A
Voltage Rating: 50 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 500V AC
Contact Resistance: 30mΩ max
Operating Temperature: -25°C ~ 85°C

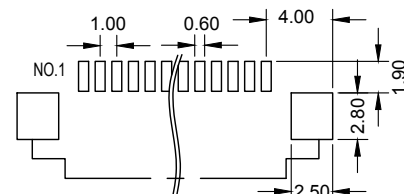

Recommended P.C.Board Layout

Ordering Information

MFCC108 - XX XX B001 X X

No. of Pins 04 ~ 30

Standard Plating
01=Tin
02=Gold Flash
...

Material
A=PBT
B=PA6T
C=LCP
...



Colour
1=Black
2=White
...

Pitch:1.00mm (0.0393")
FPC Connector Straight SMT Type

Mxconn




Materials

Contact Material: Phosphor Bronze
Insulator Material: PA46/LCP
Flame Retardant Grade: UL 94V-0

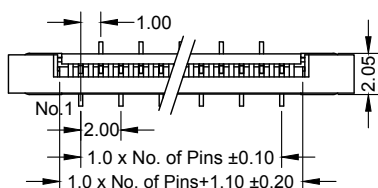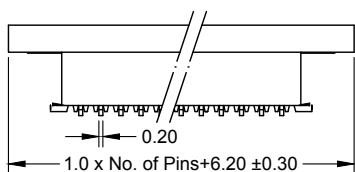

Specifications

Current Rating: 0.5 A
Voltage Rating: 50 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 500V AC
Contact Resistance: 30mΩ max
Operating Temperature: -25°C ~ 85°C

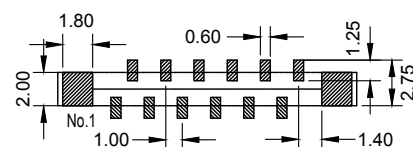

Recommended P.C.Board Layout

Ordering Information

MFCC107 - XX XX A001 X X

No. of Pins 04 ~ 30

Standard Plating
01=Tin
02=Gold Flash
...

Material
A=PBT
B=PA6T
C=LCP
...

Colour
1=Black
2=White
...