

Pitch:1.00mm (0.0393")  
Wire To Board Single Row SMT Type







**Materials**

Contact Material: Brass  
Insulator Material: PA6T/LCP  
Flame Retardant Grade: UL 94V-0

**Specifications**

Current Rating: 1.0 A  
Voltage Rating: 50 V  
Insulation Resistance: 100MΩ min  
Withstand Voltage: 500V AC  
Contact Resistance: 20mΩ max  
Operating Temperature: -25°C~85°C

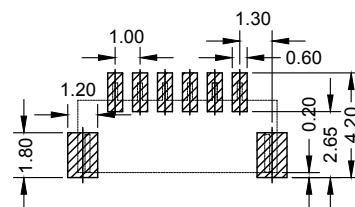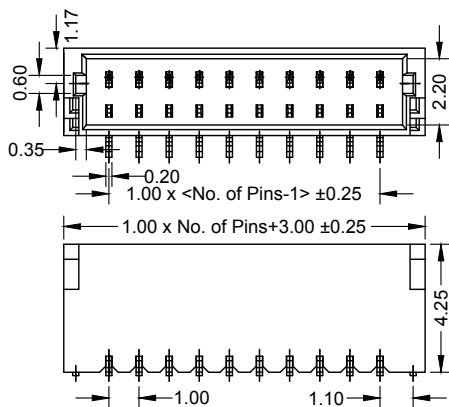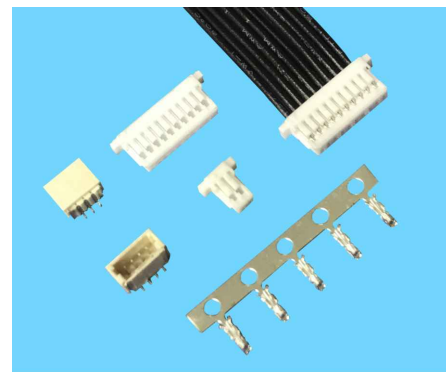

Recommended P.C.Board Layout

**Ordering Information**

MWCC101 - XX XX A001 X X

No. of Pins 02 ~ 20

Standard Plating  
01=Tin  
02=Gold Flash  
...

Material  
A=PBT  
B=PA6T  
C=LCP  
...

Colour  
1=Black  
2=White  
...

Pitch:1.00mm (0.0393")  
Wire To Board Single Row SMT Type






**Materials**

Contact Material: Brass  
Insulator Material: PA6T/LCP  
Flame Retardant Grade: UL 94V-0

**Specifications**

Current Rating: 1.0 A  
Voltage Rating: 50 V  
Insulation Resistance: 100MΩ min  
Withstand Voltage: 500V AC  
Contact Resistance: 20mΩ max  
Operating Temperature: -25°C~85°C

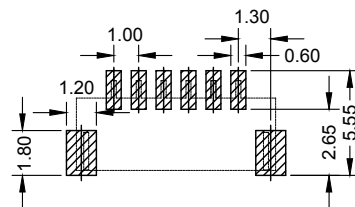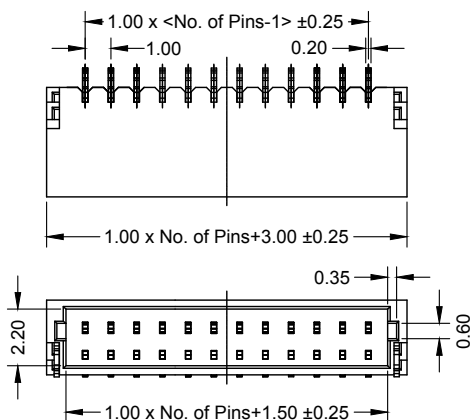

Recommended P.C.Board Layout

**Ordering Information**

MWCC101 - XX XX B001 X X

No. of Pins 02 ~ 20

Standard Plating  
01=Tin  
02=Gold Flash  
...

Material  
A=PBT  
B=PA6T  
C=LCP  
...

Colour  
1=Black  
2=White  
...