


Pitch:1.25mm (0.049")
Wire To Board Single Row DIP Type

Mxconn




Materials

Contact Material: Brass
Insulator Material: PA66
Flame Retardant Grade: UL 94V-0

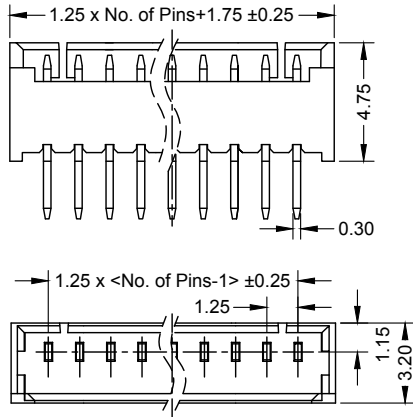

Specifications

Current Rating: 1.0 A
Voltage Rating: 125 V
Insulation Resistance: 500MΩ min
Withstand Voltage: 500V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

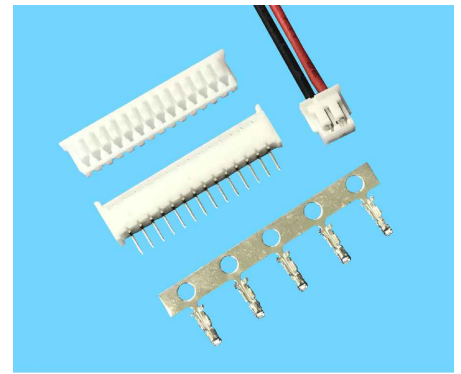

Recommended
P.C.Board Layout

Ordering Information

MWDA101 - XX XX A001 X X


No. of Pins: 02 ~ 25
Standard Plating: 01=Tin, 02=Gold Flash, ...
Material: A=PBT, B=PA6T, C=LCP, ...
Colour: 1=Black, 2=White, ...

Pitch:1.25mm (0.049")
Wire To Board Single Row SMT Type

Mxconn



Materials

Contact Material: Brass
Insulator Material: PA66/PA6T/LCP
Flame Retardant Grade: UL 94V-0

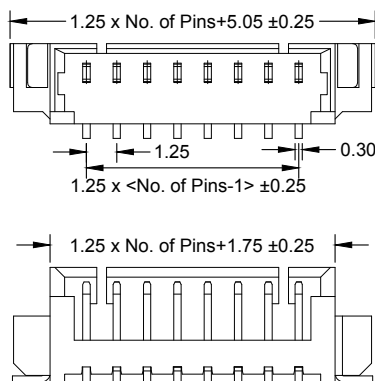

Specifications

Current Rating: 1.0 A
Voltage Rating: 125 V
Insulation Resistance: 500MΩ min
Withstand Voltage: 500V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

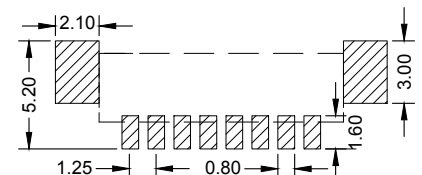

Recommended
P.C.Board Layout

Ordering Information

MWDC102 - XX XX A001 X X

No. of Pins: 02 ~ 16
Standard Plating: 01=Tin, 02=Gold Flash, ...
Material: A=PBT, B=PA6T, C=LCP, ...
Colour: 1=Black, 2=White, ...