

Pitch:2.50mm (0.098")
Wire To Board Single Row DIP Type





Mxconn

Materials

Contact Material: Brass
Insulator Material: PA66
Flame Retardant Grade: UL 94V-0

Specifications

Current Rating: 3.0 A
Voltage Rating: 250 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 1000V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

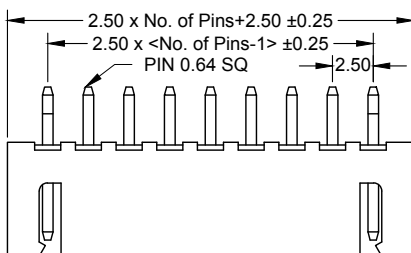

Recommended P.C.Board Layout

Ordering Information

MWGA101 - XX XX A001

No. of Pins: 02 ~ 20

Standard Plating: 01=Tin, 02=Gold Flash, ...

X X

Material: A=PBT, B=PA6T, C=LCP, ...

Colour: 1=Black, 2=White, ...

Pitch:2.50mm (0.098")
Wire To Board Single Row Right Angle DIP Type





Mxconn

Materials

Contact Material: Brass
Insulator Material: PA66
Flame Retardant Grade: UL 94V-0

Specifications

Current Rating: 3.0 A
Voltage Rating: 250 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 1000V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

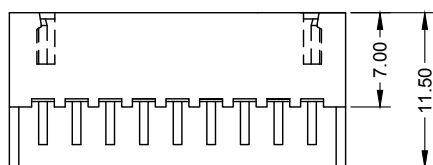

Recommended P.C.Board Layout

Ordering Information

MWGB102 - XX XX A001

No. of Pins: 02 ~ 16

Standard Plating: 01=Tin, 02=Gold Flash, ...

X X

Material: A=PBT, B=PA6T, C=LCP, ...

Colour: 1=Black, 2=White, ...