

Pitch:2.00X2.00mm(0.079"X0.079")
Board Spacer Dual Rows Right Angle Dip Type

MXCONN
MMFB203 Series

Specifications


Current Rating: 2.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
PBT




Mating with




M FFA2XX




MFFB207







MFFC2XX




MFFD201




MFFA203

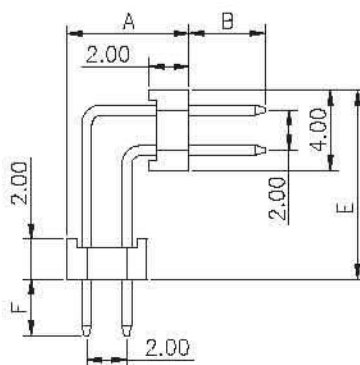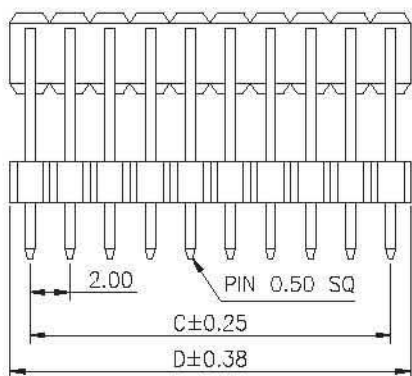


MFFB203




MFFE201



MFFC204



MFFB204



MFFA203

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
03	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
04	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
05	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
06	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
07	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
08	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
09	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00
11	20.00	22.00	21	40.00	42.00	31	60.00	62.00			

Ordering Information

MMFB203-	XX	XX	A	XXX
No. of Pins per Row	Standard Plating	Standard Plating	Pin Length (A / B / E / F)	
02 ~40	02 :Gold Flash	01 :Tin	007	:A=6.10,B=3.00,E=6.10,F=4.40
	Selective Plating	05 :Gold Flash / Tin	008	:A=8.00,B=3.50,E=8.00,F=3.50
				Selective Length
				Custom Length Available

* Standard Packaging: Tube